


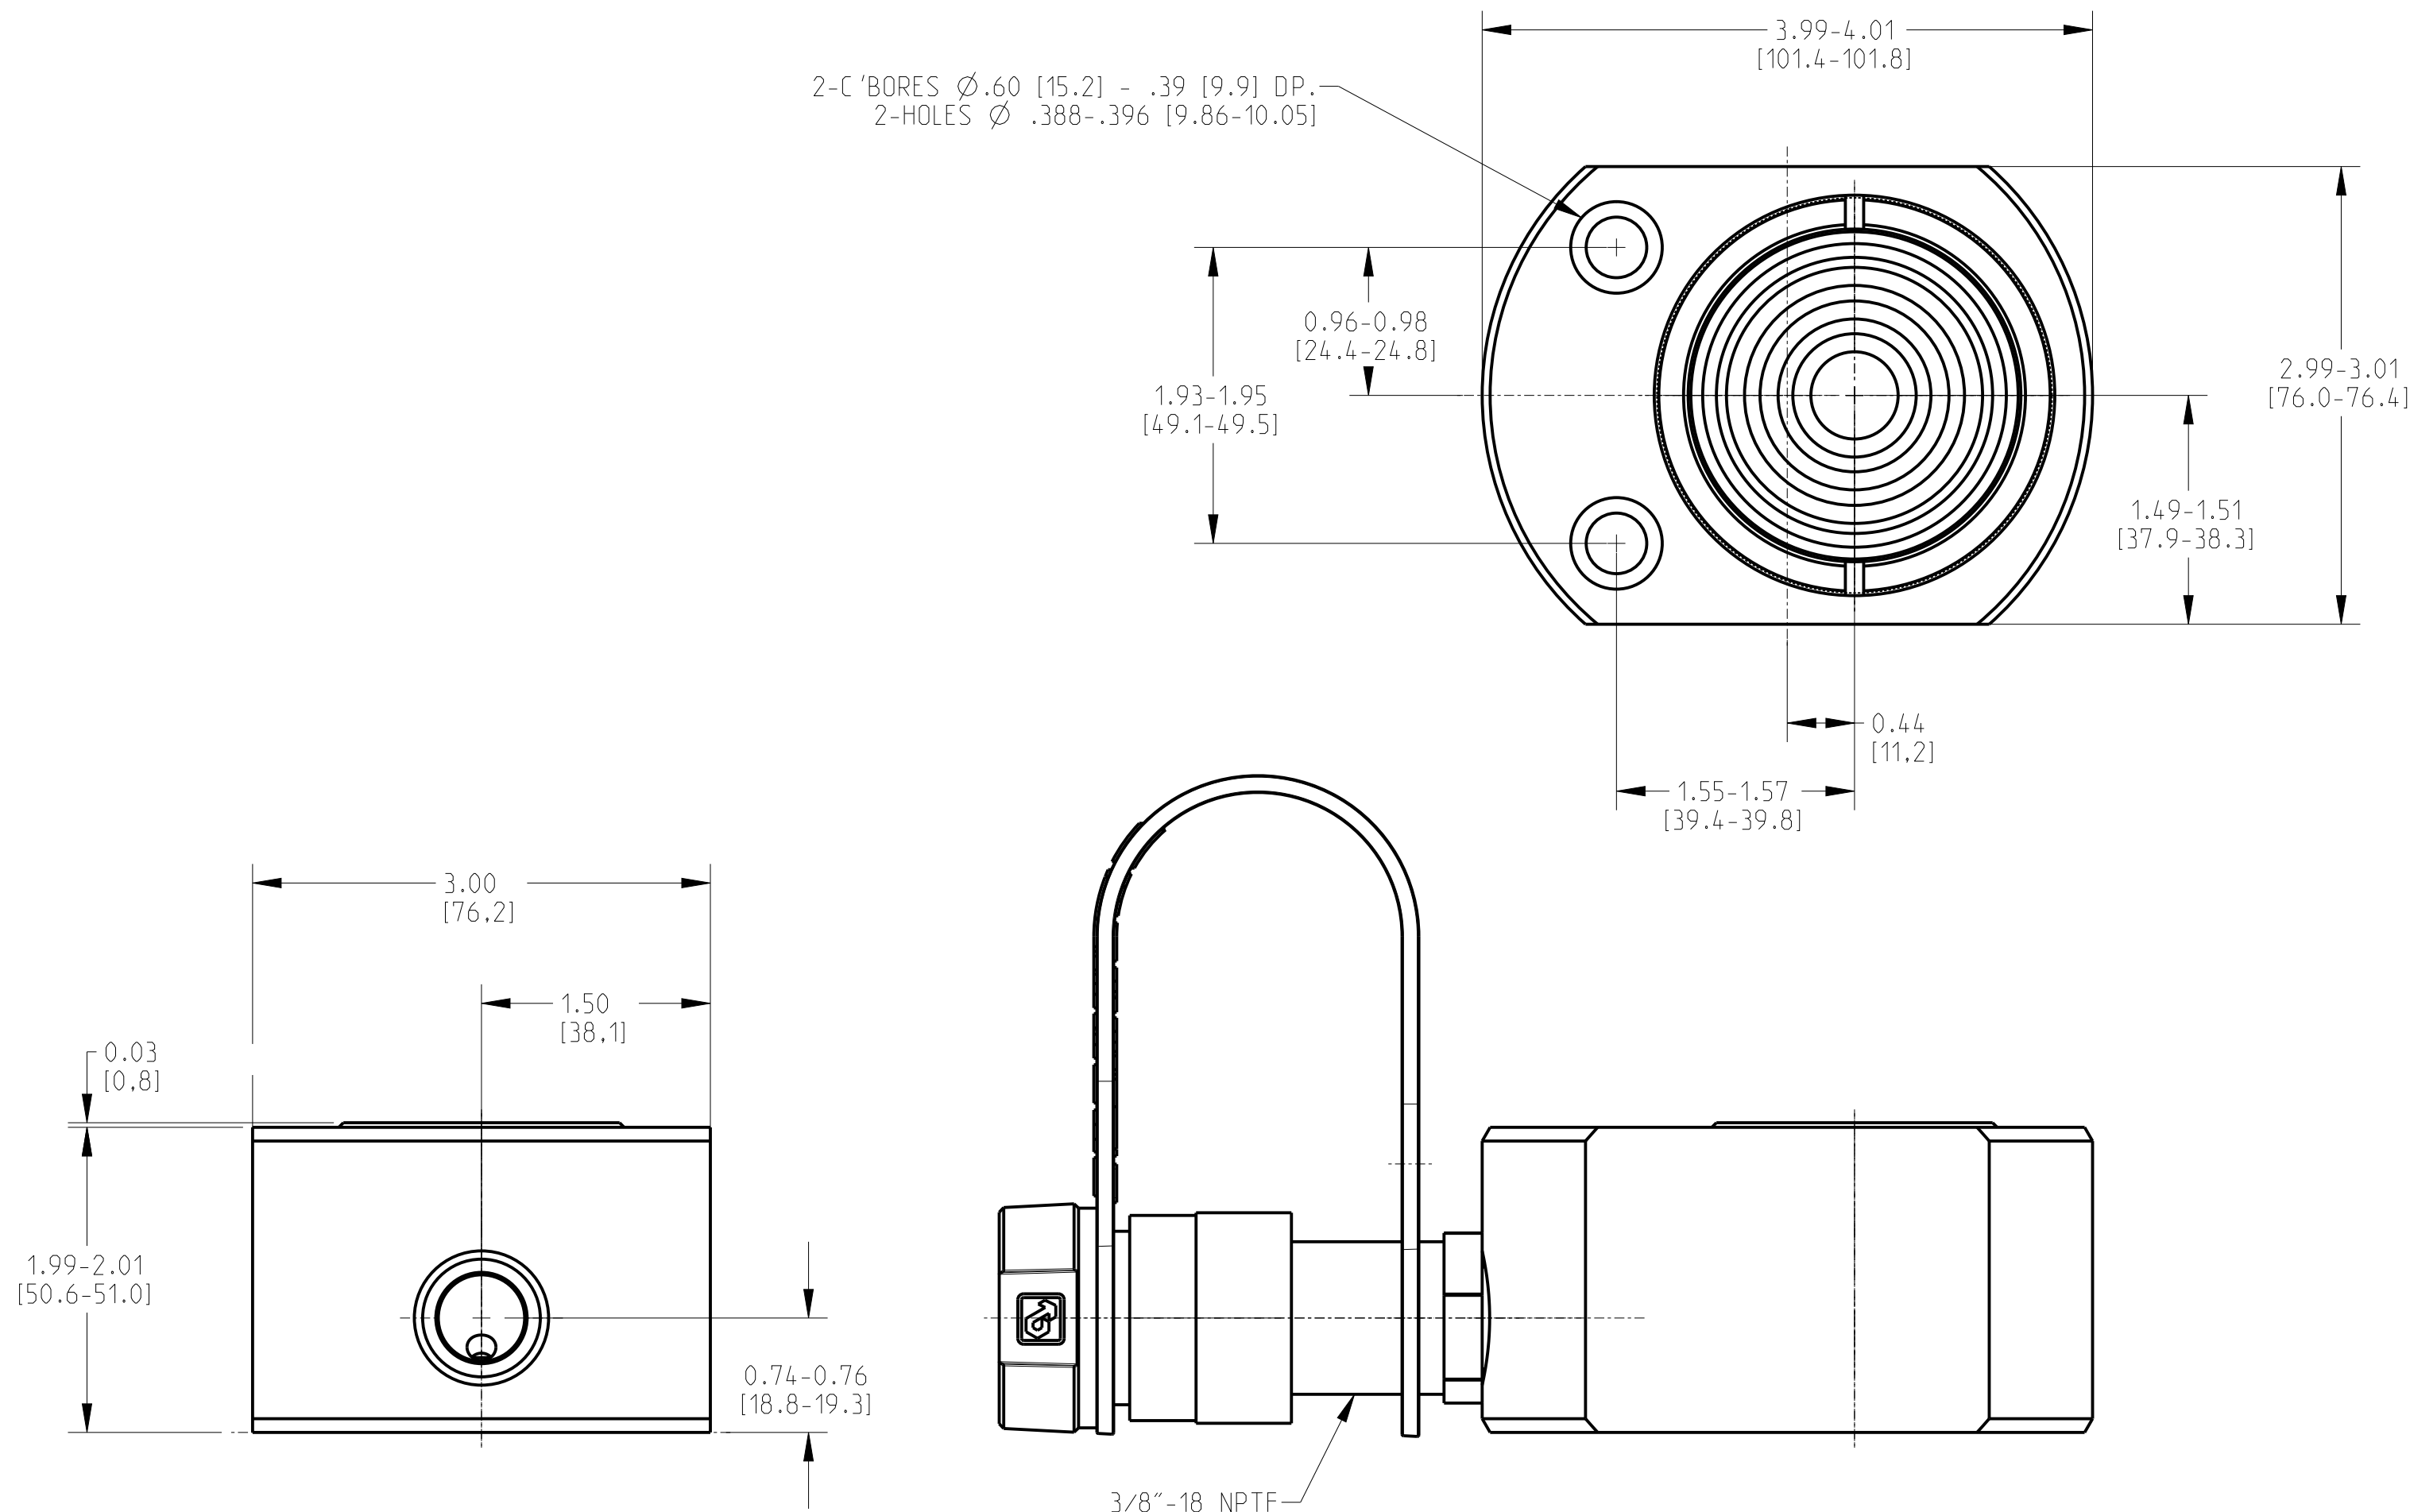

NOTES:

COLLAPSED HT - 2.03/51.6
EXTENDED HT - 2.47/62.7
STROKE - .44/11.2
EFFECTIVE AREA - 4.430 IN²/28.58 CM²
OIL CAPACITY - 2.17IN³/35.56 CM³
RATED LOAD - 20T/18,144 KG
PRESSURE AT RATED LOAD - 9.029 P.S.I./622.7 BARS
BORE DIA - 2.38/60.4
PLUNGER DIA - 2.00/50.8
ACTUAL WEIGHT - 6.5 LBS/29 KG

ALL DIMENSIONS IN INCHES/[MILLIMETERS]

Language Code - Primary/Secondary eng/		Document Type: Assembly		Description: ID SPEC FOR 20T CYL RSM200		
THIRD ANGLE PROJECTION		Technical Reference: Gomez, Juan Carlos				
DO NOT SCALE DRAWING		Approver: Paredes, Irene		Rev C	Date of Issue 2021SEP22	Sheet 1/1
Per ASME Y14.5 - 2009		Creator: Montero, Miguel		This print and information herein is confidential and proprietary and is the property of ENERPAC. It is not to be copied or reproduced without written permission.		